


NOTES:

1. Main disconnect panel may not be used as an electrical race way.
2. Line taps shall be made by the electrical contractor if a galvanized wiring trough is used.
3. Weatherproof fittings required.
4. Two (2) disconnects can be substituted with (1) fused disconnect.
5. Wire sized to total disconnect(s) size.
6. Neutral(s) may only be reduced one size on residential application. No reduction of the neutral(s) is allowed on commercial application.
7. Notify Bartlett Electric Cooperative office when meter assembly is complete.
8. Bartlett will provide conduit and wire from transformer into UJB.
9. Member furnishes and installs UG service wire and conduit from UJB to meter.
10. Electrical contractor will leave 10' of tail at meter base so cooperative can terminate in UJB and meter base.
11. Electrical contractor will intercept conduit stub out from UJB (BEC provided)



FOR THE MEMBER'S SAFETY,
WIRING INSTALLATIONS SHALL
CONFORM TO THE REQUIREMENTS
OF THE NEC AND NESC.

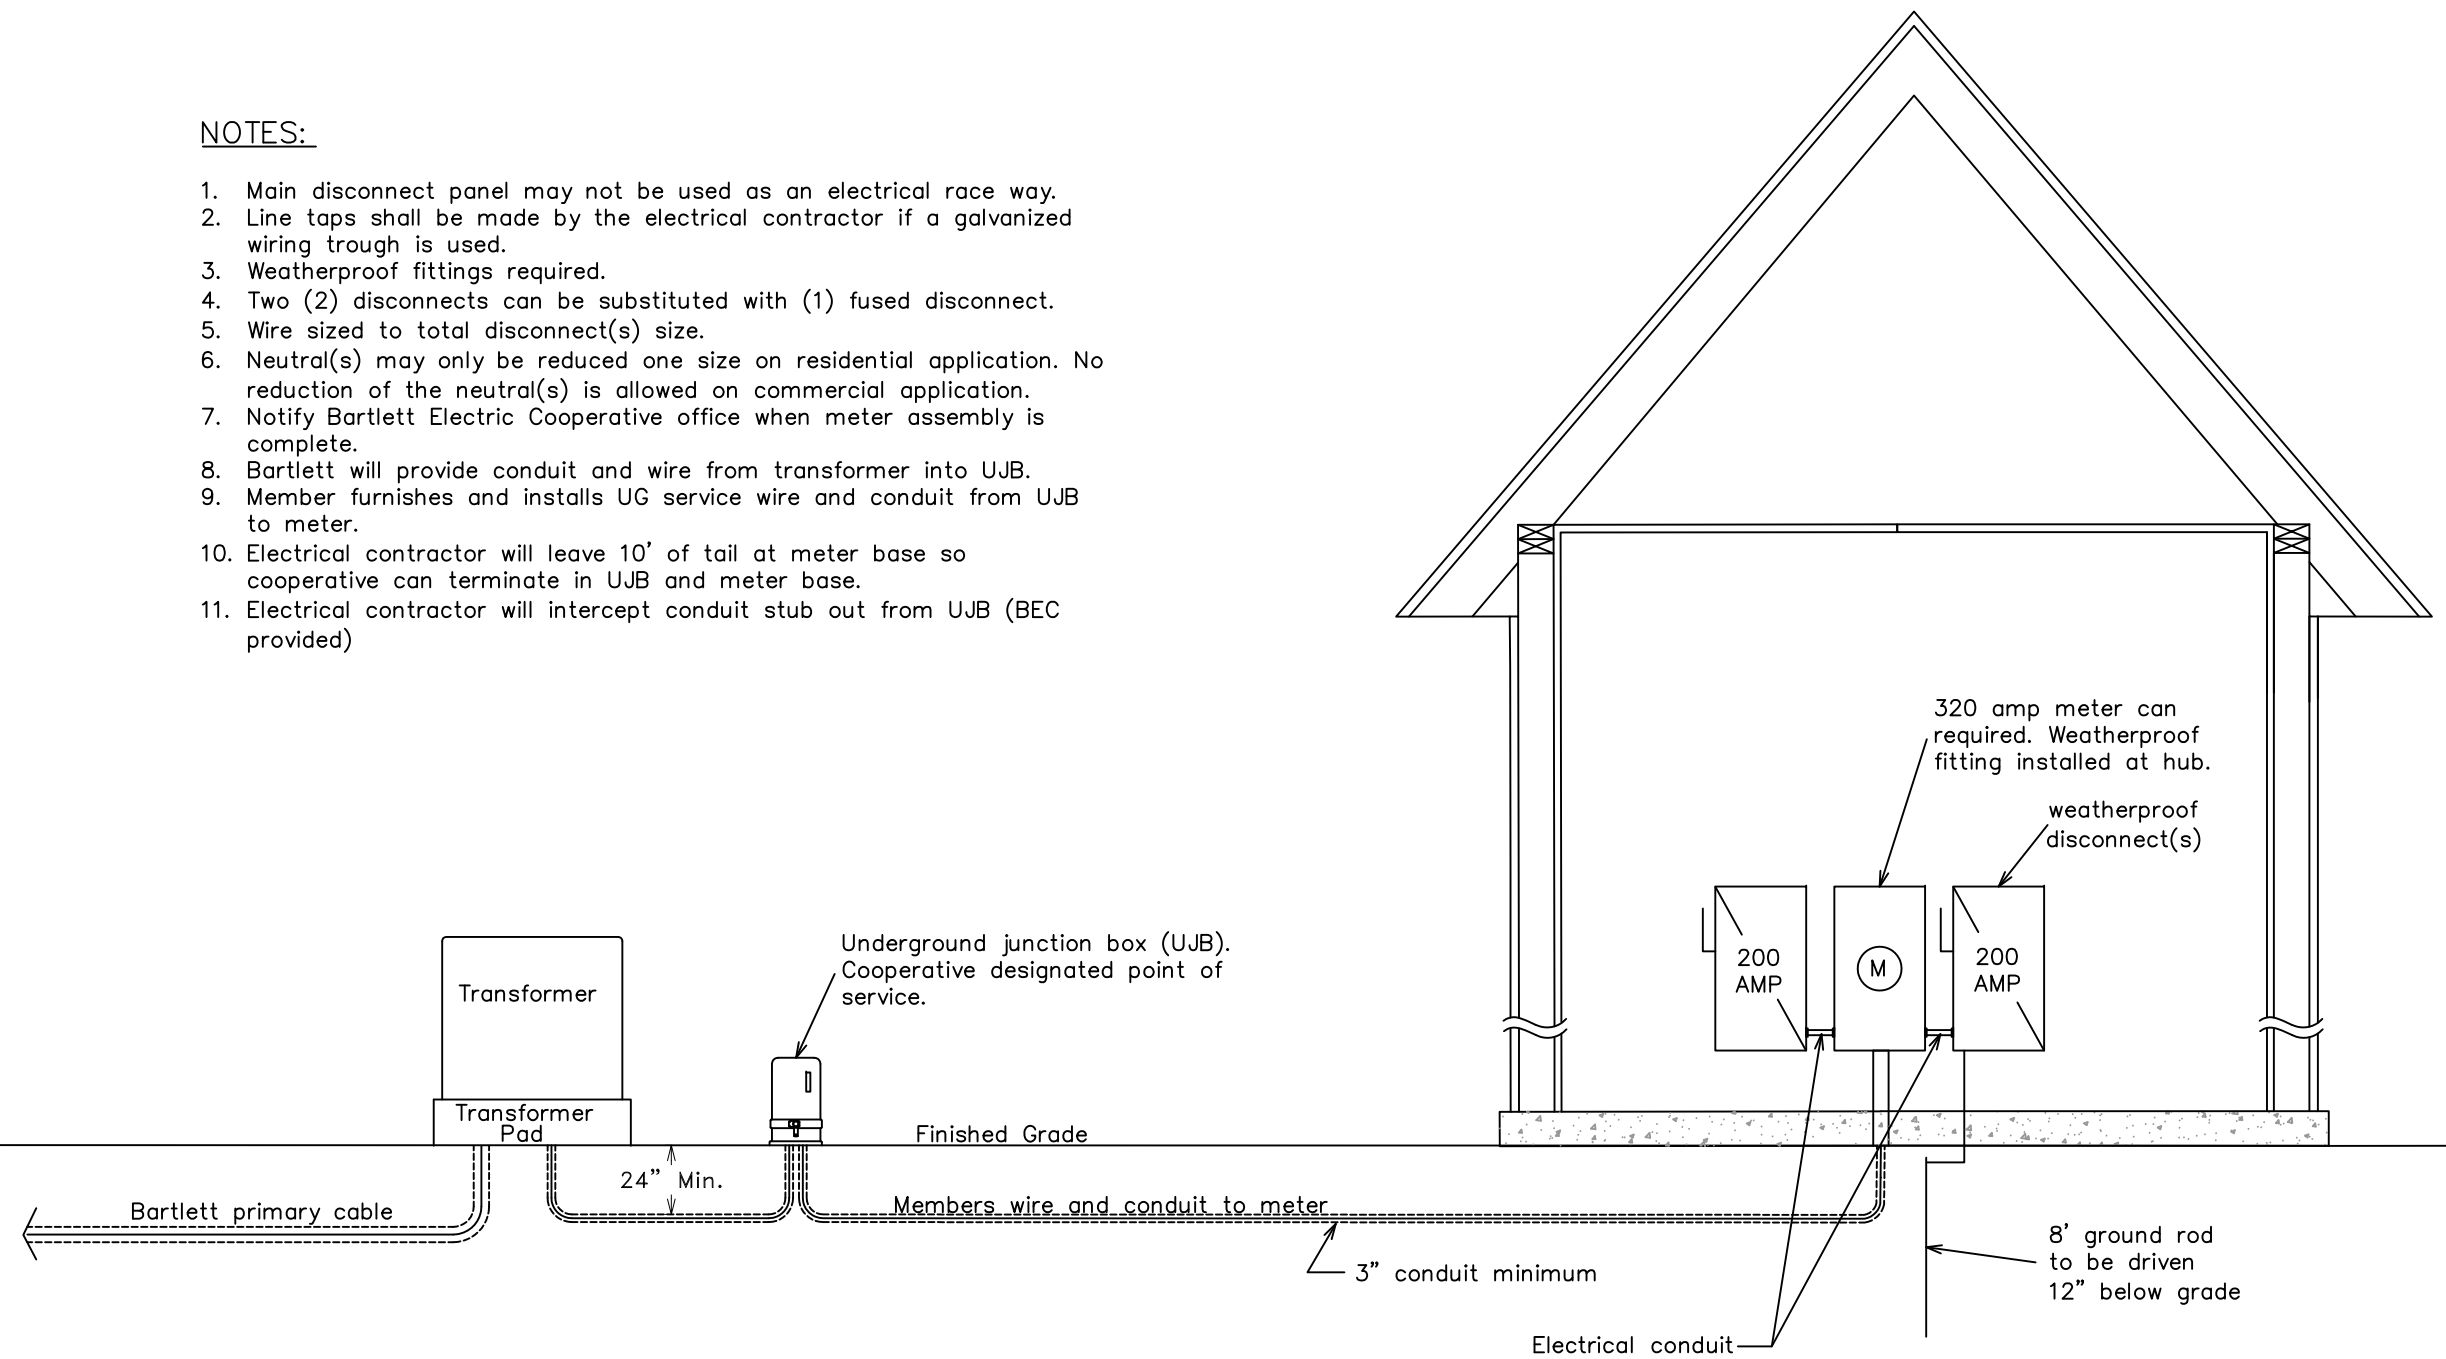

BEC Power
27492 HWY 95
Bartlett, Texas 76511

**1Ø, 320 AMP SERVICE
ON BUILDING WITH CLASS
320 AMP METER SOCKET**

Drawn By: SEP	Checked By: GP	Approved By: KGS	Revised by: SE
Scale: N.T.S.	Date: 07-26-21	Drawing #: BEC-MS-3	Date: 07/26/21